

Serving inspiration with every generation



Shenzhen KSTAR New Energy Co., Ltd.
Tel: +86-755-21389008 Ext 8508 Fax: +86-755-21389006
Web: www.kstar.com www.kstar.eu E-mail: info@kstar.com

We reserve the right to make technical changes or modify the contents of this document without prior notice. With regard to purchase orders, the agreed particulars shall prevail. KSTAR does not accept any responsibility whatsoever for potential errors or possible lack of information in this document.



202601-V1



Serving inspiration with every generation

K-Home



www.kstar.com www.kstar.eu

2026

ABOUT KSTAR

1996 Overseas Expansion

Enter the European and US Market

1993 KSTAR Established

Enter Offline UPS Field

2004 Further Development

Enter High-power Online UPS Field

1998 New Manufacturing Base

Guanlan Industrial Park
Inaugurated in Shenzhen

2010 IPO and Public Debut

Listed in Shenzhen Stock Exchange

2009 Enter New Energy Field

1st PV Inverter Produced

2015 National Certified Technology Center

Certified by National Quality Management System

2013 Explore New Opportunities

Enter the Electric Vehicles Market

2023 KSTAR Vietnam National-level Green Factory

Vietnam Plant in Operation

2021 Further Invest in ESS Facilities

Open Jiangxi Changxin Gold Sunshine Power Supply Co.,Ltd

2019 CATL & KSTAR Partnership

Establish Joint Venture Factory with CATL

2025 Jiangxi Gold Sunshine

Launches advanced punched grid plate production

2024 Construction of the High-end New Energy and Energy Storage Industrial Base




Unlock new business mode independently

KSTAR, a leading global new energy solution provider founded in 1993, excels in key solar markets worldwide. Our expertise spans the spectrum, delivering cutting-edge PV inverters and energy storage systems for residential, commercial & industrial, and large-scale utility needs.

solutions for a diverse clientele in 180 countries and regions, with an impressive 68GW of KSTAR products already installed globally.

We are always generating superior solutions for energy and more. Let's power the future together.

Backed by 30+ years of experience in electrical and electronic technology, KSTAR is committed to superior new energy

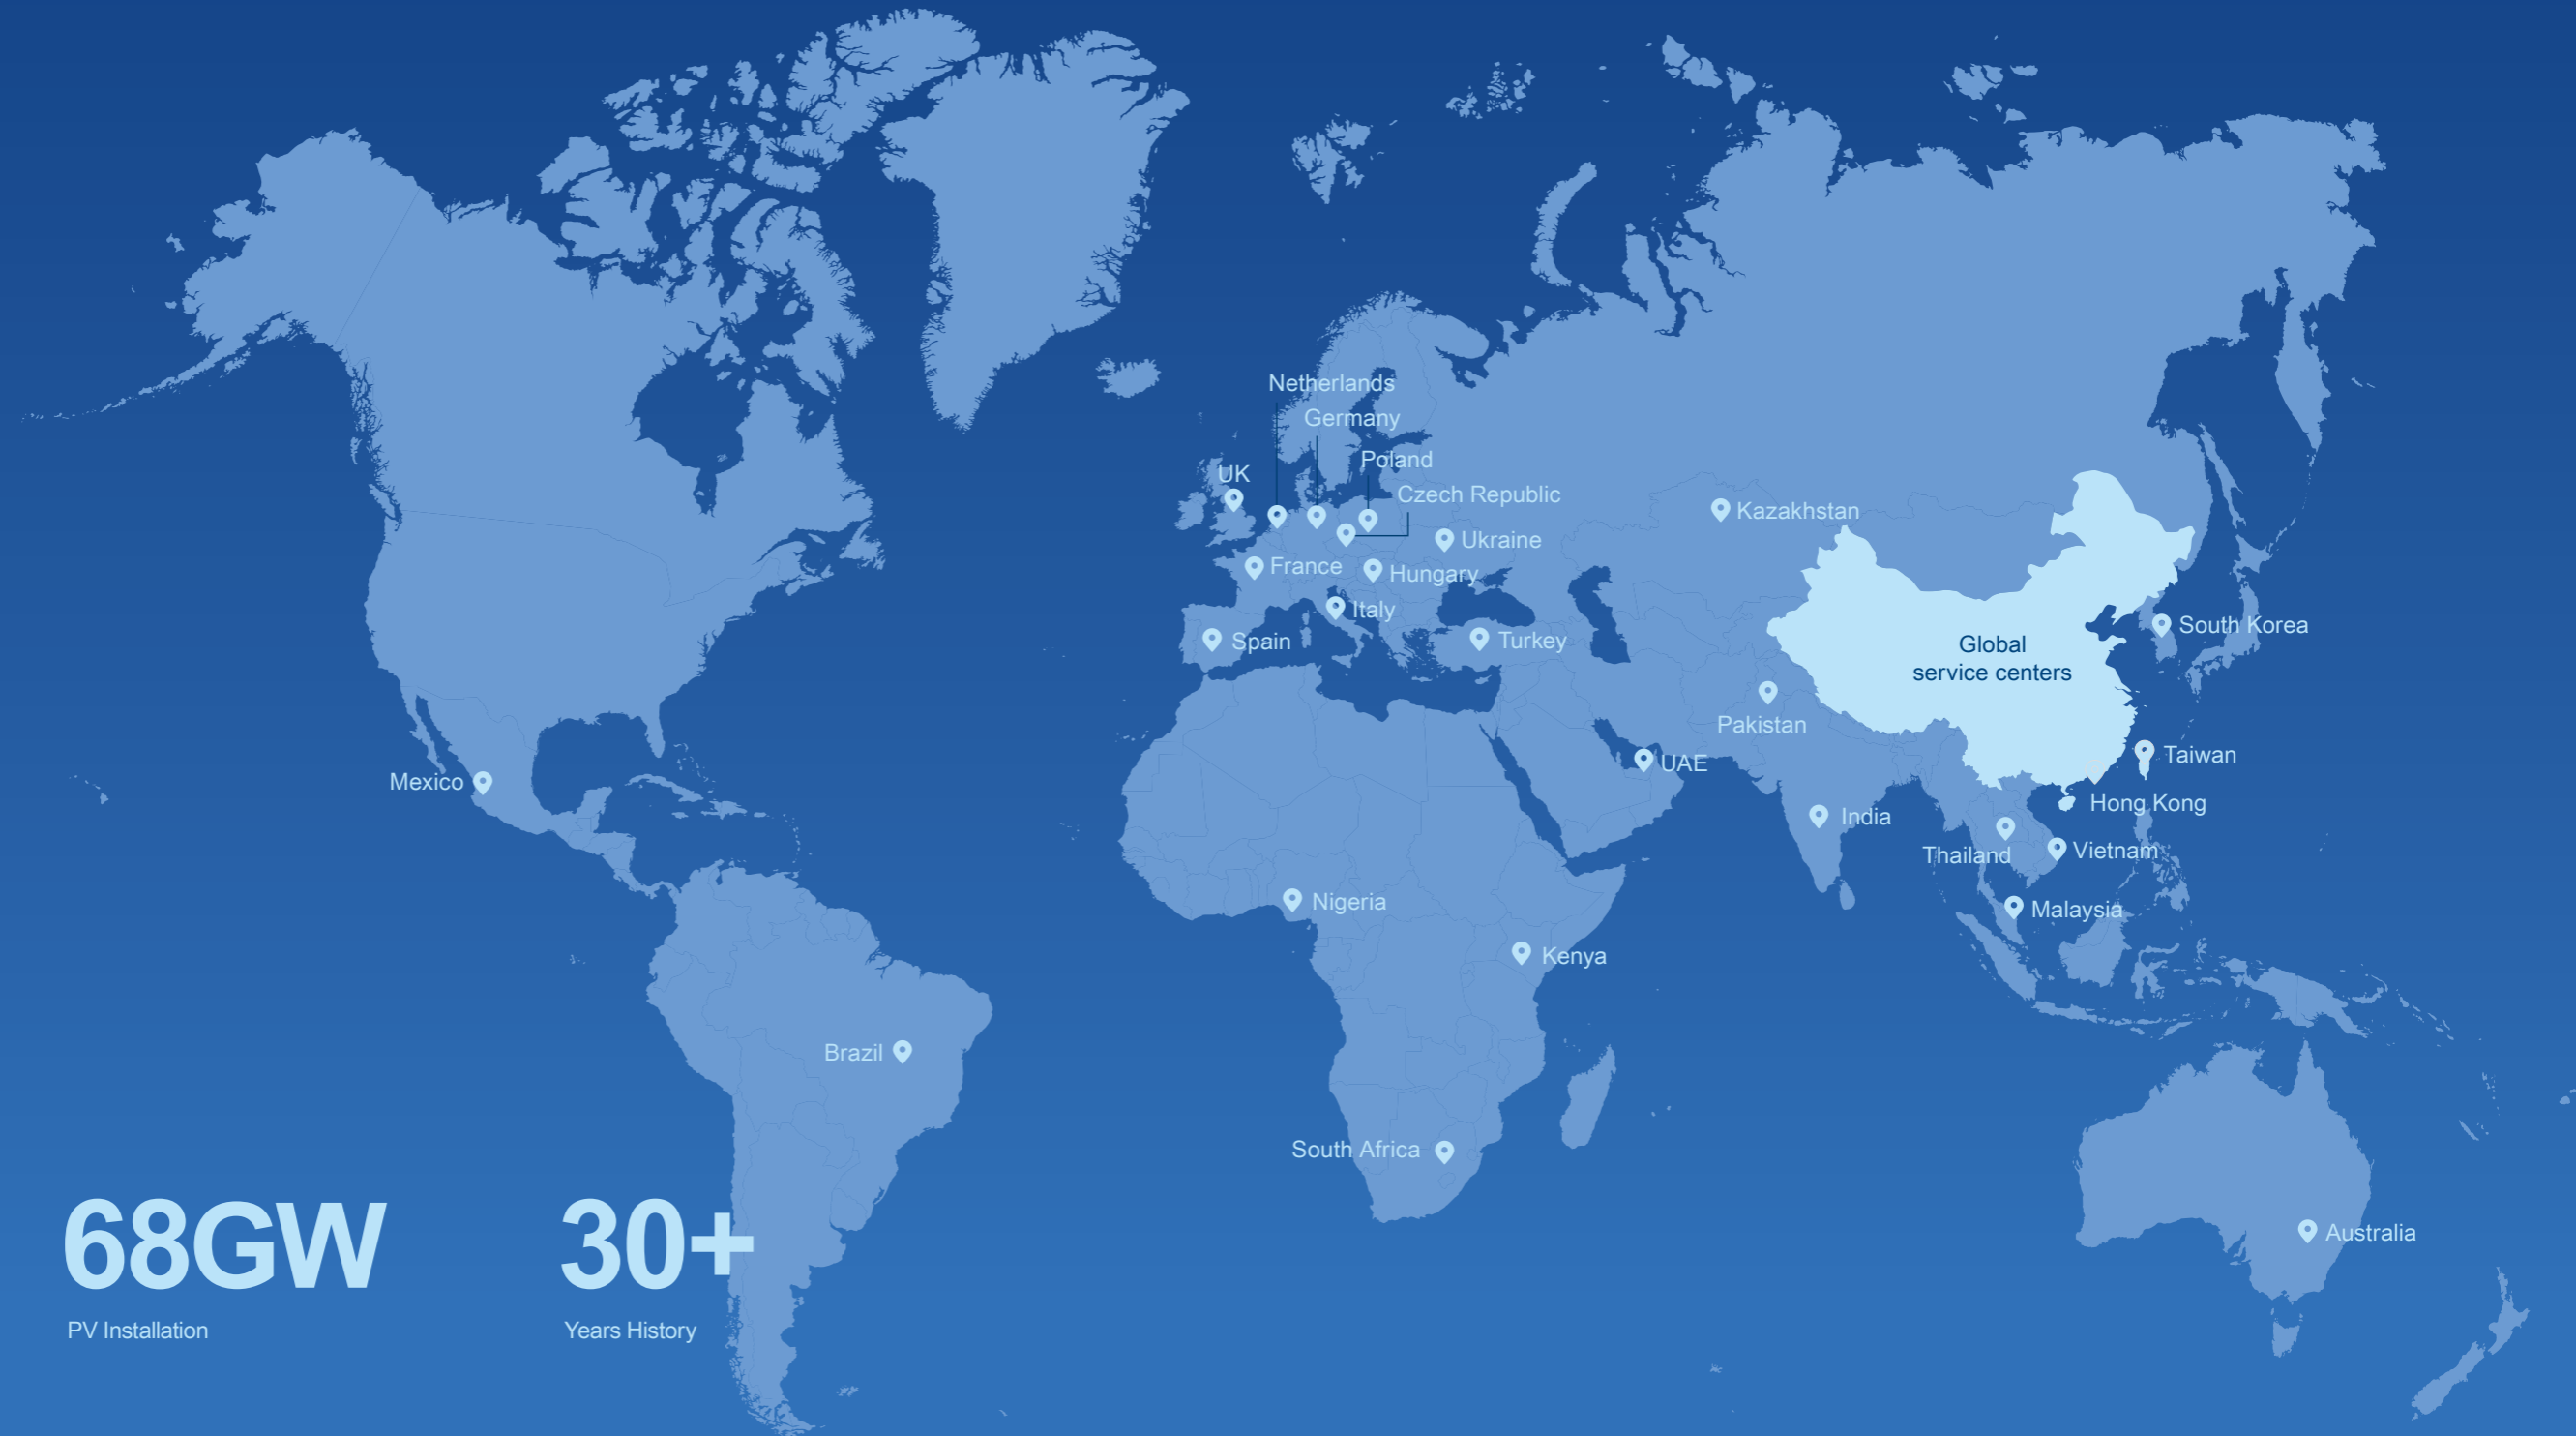

180+

Countries & Regions

68GW

PV Installation

30+

Years History

Australia

South Korea

Taiwan

Hong Kong

Vietnam

Malaysia

Thailand

India

Pakistan

UAE

Kenya

South Africa

Nigeria

Brazil

Mexico

Kazakhstan

Ukraine

Hungary

Italy

Turkey

UK

France

Spain

Germany

Poland

Czech Republic

Global service centers

Thriving Three Decades: Your Industrial Partner and Green Home Expert



BlueSpark Series Residential ESS NEW

Single Phase / All-in-one Hybrid System / 3.68-6 kW

Save Your Energy Bill

- ▶ Powered by Tire 1 battery cell
- ▶ Human safe low-voltage solution
- ▶ Optional AFCI

Smart Home Energy

- ▶ Supports Self Consumption, Peak Shaving, Time-of-use, and Battery Priority operation modes
- ▶ SG Ready Heat Pump compatible

High Performance

- ▶ DC / AC ratio up to 2
- ▶ Long battery cycle life

Easy Installation

- ▶ Stackable design, no wiring required
- ▶ Compact and space-saving
- ▶ IP66 rating for protection

Flexible Expansion

- ▶ Supports both on-grid and off-grid parallel configurations
- ▶ Max. 4 battery packs per system

Smart O&M

- ▶ 24 / 7 cloud monitoring
- ▶ Easy commissioning via Bluetooth
- ▶ Remote firmware upgrades



| Battery Model | | BP48100PF1A-G2 | |
|------------------------------------|--|-------------------------------------|---|
| General Parameters | | | |
| Battery Type | LFP (LiFePO4) | Operation | |
| Cell Brand | EVE | Max. Continuous Charging Current | 80 A (single battery pack) |
| Energy Capacity | 5.12 kWh ¹⁾ | Max. Continuous Charging Power | 4096 W |
| Usable Capacity | 4.6 kWh ²⁾ | Max. Continuous Discharging Current | 80 A (single battery pack) |
| Max. Depth of Discharge | 95% | Max. Continuous Discharging Power | 4096 W |
| Normal Voltage | 51.2 V | Operating Temperature Range | -10 to 50°C (Charging); -10 to 50°C (Discharging) ³⁾ |
| Operating Voltage Range | 44.8 ~ 57.6 V | Cooling Type | Natural Cooling |
| Battery Pack Round-Trip Efficiency | > 94% | Humidity | 0 ~ 95% (no condensation) |
| Weight | 56 kg | BMS | |
| Dimensions (W x H x D) | 725 x 370 x 190 mm | Modules Connection | Max. 4 |
| IP Protection | IP65 | Capacity | 100 / 200 / 300 / 400 Ah |
| Warranty | 5 Year Product Warranty, 10 Year Performance | Communication | CAN |
| Certificate | | Monitoring Parameters | System voltage, current, battery voltage, Battery temperature, PCBA temperature measurement |
| Safety and Transportation | Pack: IEC/EN 62619; UN38.3; Cell: IEC/EN 62619; UN38.3; UL1973 | | |

1) Total Energy Capacity is tested under the following conditions: @25°C, 0.5C charging / 0.5C discharging, at the beginning of life.
 2) Usable Energy Capacity refers to the energy discharged from 100% to the minimum state of energy (SoE).
 3) The operating temperature parameters only apply to battery pack models with heating function. For battery pack models without heating function, the operating temperature range will be: 0 to 50°C(Charging), -10 to 50°C (Discharging).
 4) Minimum voltage for inverter to start power output.
 5) Nominal Output current and Maximum output current is 25 A for Ireland
 6) Max. AC continuous output power is 4999 W for Australia and 4600 W for Germany and South Africa.
 7) Max. AC apparent output power is 4999 VA for Australia and 4600 VA for Germany and South Africa
 8) Max. output current is 21.7 A for Australia and 20 A for Germany and South Africa.

| Hybrid Inverter Model | E3.68KS-D22 | E5KS-D22 | E6KS-D22 |
|-------------------------------------|--|---|----------------------|
| PV Input | | | |
| Recommended Max. PV Array | 7.2 kW | 10 kW | 10 kW |
| Input Power @STC | | | |
| Max PV Voltage | | 500 V | |
| Nominal Voltage | | 360 V | |
| MPPT Voltage Range | | 120 ~ 480 V | |
| MPPT Voltage Range with Full Load | 200 ~ 425 V | 250 ~ 425 V | 250 ~ 425 V |
| Start Voltage ⁴⁾ | | 120 V | |
| Number of MPPT Tracker | | 2 | |
| String per MPPT Tracker | | 1 | |
| Max. Input Current per MPPT | | 20 A | |
| Max. Short-Circuit Current per MPPT | | 25 A | |
| AC Output & Input (Grid) | | | |
| Max. AC Continuous Output Power | 3680 W | 5000 W ⁶⁾ | 6000 W |
| Max. AC Apparent Output Power | 3680 VA | 5000 VA ⁷⁾ | 6000 VA |
| Max. Continuous Input Power | 7360 W | 9200 W | 9200 W |
| Nominal AC Voltage | | 230 Vac | |
| Normal Frequency | | 50 Hz / 60 Hz (±5 Hz) | |
| Normal Output Current | 16 A | 21.7 A | 26.1 A ⁵⁾ |
| Max. Output Current | 16.7 A | 22.7 A ⁵⁾ | 27.3 A ⁵⁾ |
| Max. Input Current | 32 A | 40 A | 40 A |
| Power Factor (cosΦ) | | -0.8 (Lagging) ~ 0.8 (Leading) | |
| THDi | | < 3% | |
| AC Output (Backup) | | | |
| Normal AC Output Power | 3680 W | 5000 W | 6000 W |
| Max. AC Output Power | 3680 VA | 5000 VA | 6000 VA |
| Max. Output Current | 16 A | 21.7 A | 26.1 A |
| Normal Output Voltage | | 230 Vac | |
| Nominal Output Frequency | | 50 Hz / 60 Hz | |
| Output THDv (@Linear Load) | | < 3% (Linear Load) | |
| Battery Input | | | |
| Battery Type | | LFP (LiFePO4) | |
| Nominal Battery Voltage | | 48 V | |
| Charging Voltage Range | | 42 ~ 58 V | |
| Max. Charging / Discharging Current | 80 A / 80 A | 120 A / 120 A | 125 A / 125 A |
| Rated Charging / Discharging Power | 3600 W / 3900 W | 5000 W / 5400 W | 6000 W / 6400 W |
| Battery Capacity | | 100 ~ 400 Ah | |
| Efficiency | | | |
| Max. PV Efficiency | | 97.2% | |
| Euro. Efficiency | 95.9% | 96.4% | 96.5% |
| Protection | | | |
| DC Switch | | Integrated | |
| Anti-islanding Protection | | Integrated | |
| Residual Current Monitoring | | Integrated | |
| AC Short Circuit Protection | | Integrated | |
| AC Overvoltage Protection | | Integrated | |
| DC / AC Surge Protection | | DC Type II; AC Type III | |
| Remote Shutdown | | Integrated | |
| AFCI | | Optional | |
| General Specification | | | |
| Dimensions (W x H x D) | | 725 × 390 × 245 mm | |
| Weight | 24.8 kg | 25.5 kg | 25.5 kg |
| Operating Temperature Range | | -25°C to + 60°C (> 45°C derating) | |
| Cooling Type | | Natural Convection | |
| Max. Operation Altitude | | ≤ 4000 m | |
| Operation Humidity | | 0 ~ 95% (no condensation) | |
| IP Class | | IP66 | |
| Topology | | High Frequency Isolation | |
| Communication | | RS485 / WIFI / (4G / Ethernet optional) | |
| Display | | LED+Bluetooth / APP / WEB | |
| Certification & Standard | IEC/EN62109-1&2; IEC/EN 61000-6-1; IEC/EN 61000-6-2; EN 61000-6-3; IEC/EN 61000-6-4; IEC/EN 61000-3-11; EN 61000-3-12; IEC 60529; IEC 61727; IEC 62116; IEC 60068; IEC 61683; EN 50549-1; EN 50549-10; VDE-AR-N 4105; G98/G99; NC RfG:2018; C10/C11; CEI-021 | | |

BlueSpark Series Residential ESS NEW

Three Phase / All-in-one Hybrid System / 4-6 kW

Save Your Energy Bill

- ▶ Powered by Tire 1 battery cell
- ▶ Human safe low-voltage solution
- ▶ Optional AFCI

Smart Home Energy

- ▶ Supports Self Consumption, Peak Shaving, Time-of-use, and Battery Priority operation modes
- ▶ SG Ready Heat Pump compatible

High Performance

- ▶ DC / AC ratio up to 2
- ▶ Long battery cycle life
- ▶ 100% three-phase unbalanced output

Easy Installation

- ▶ Stackable design, no wiring required
- ▶ Compact and space-saving
- ▶ IP66 rating for protection

Flexible Expansion

- ▶ Supports both on-grid and off-grid parallel configurations
- ▶ Max. 8 battery packs per system

Smart O&M

- ▶ 24 / 7 cloud monitoring
- ▶ Easy commissioning via Bluetooth
- ▶ Remote firmware upgrades



| Battery Model | | BP48100PF1A-G2 | |
|------------------------------------|--|-------------------------------------|---|
| General Parameters | | | |
| Battery Type | LFP (LiFePO4) | Max. Continuous Charging Current | 80 A (single battery pack) |
| Cell Brand | EVE | Max. Continuous Charging Power | 4096 W |
| Energy Capacity | 5.12 kWh ¹⁾ | Max. Continuous Discharging Current | 80 A (single battery pack) |
| Usable Capacity | 4.6 kWh ²⁾ | Max. Continuous Discharging Power | 4096 W |
| Max. Depth of Discharge | 95% | Operating Temperature Range | -10 to 50°C (Charging); -10 to 50°C (Discharging) ³⁾ |
| Norminal Voltage | 51.2 V | Cooling Type | Natural Cooling |
| Operating Voltage Range | 44.8 ~ 57.6 V | Humidity | 0 ~ 95% (no condensation) |
| Battery Pack Round-Trip Efficiency | > 94% | BMS | |
| Weight | 56 kg | Modules Connection | Max. 8 |
| Dimensions (W x H x D) | 725 x 370 x 190 mm | Capacity | 100 / 200 / 300 / 400 / 500 / 600 / 700 / 800 Ah |
| IP Protection | IP65 | Communication | CAN |
| Warranty | 5 Year Product Warranty, 10 Year Performance | Monitoring Parameters | System voltage, current, battery voltage, Battery temperature, PCBA temperature measurement |
| Certificate | | | |
| Safety and Transportation | Pack: IEC/EN 62619; UN38.3; Cell: IEC/EN 62619; UN38.3; UL1973 | | |

1) Total Energy Capacity is tested under the following conditions: @25°C, 0.5C charging / 0.5C discharging, at the beginning of life.

2) Usable Energy Capacity refers to the energy discharged from 100% to the minimum state of energy (SoE).

3) The operating temperature parameters only apply to battery pack models with heating function. For battery pack models without heating function, the operating temperature range will be: 0 to 50°C(Charging), -10 to 50°C (Discharging).

| Hybrid Inverter Model | E4KT-D22 | E5KT-D22 | E6KT-D22 |
|-------------------------------------|--|---------------|---------------|
| PV Input | | | |
| Recommended Max. PV Array | 10 kW | 11 kW | 12 kW |
| Input Power @STC | | | |
| Max PV Voltage | 1000 V | | |
| Nominal Voltage | 720 V | | |
| MPPT Voltage Range | 140 ~ 950 V | | |
| MPPT Voltage Range with Full Load | 200 ~ 800 V | 230 ~ 800 V | 250 ~ 800 V |
| Start Voltage ¹⁾ | 200 V | | |
| Number of MPPT Tracker | 2 | | |
| String per MPPT Tracker | 1 | | |
| Max. Input Current per MPPT | 20 A | | |
| Max. Short-Circuit Current per MPPT | 25 A | | |
| AC Output & Input (Grid) | | | |
| Max. AC Continuous Output Power | 4000 W | 5000 W | 6000 W |
| Max. AC Apparent Output Power | 4400 VA | 5500 VA | 6600 VA |
| Max. Continuous Input Power | 10000 W | 11000 W | 12000 W |
| Nominal AC Voltage | 400 Vac | | |
| Normal Frequency | 50 Hz / 60 Hz (±5 Hz) | | |
| Normal Output Current | 5.8 A | 7.3 A | 8.7 A |
| Max. Output Current | 13.1 A | 13.1 A | 13.1 A |
| Max. Input Current | 21.0 A | 22.6 A | 22.6 A |
| Power Factor (cosΦ) | -0.8 (Lagging) ~ 0.8 (Leading) | | |
| THDi | < 3% | | |
| AC Output (Backup) | | | |
| Normal AC Output Power | 4000 W | 5000 W | 6000 W |
| Max. AC Output Power | 4000 VA | 5000 VA | 6000 VA |
| Normal Output Current | 5.8 A | 7.3 A | 8.7 A |
| Max. Output Current | 13.1 A | 13.1 A | 13.1 A |
| Normal Output Voltage | 400 Vac | | |
| Nominal Output Frequency | 50 Hz / 60 Hz | | |
| Output THDv (@Linear Load) | 2% (Linear Load) | | |
| Battery Input | | | |
| Battery Type | LFP (LiFePO4) | | |
| Nominal Battery Voltage | 51.2 V | | |
| Charging Voltage Range | 44 ~ 58 V | | |
| Max. Charging / Discharging Current | 100 A / 100 A | 120 A / 120 A | 120 A / 150 A |
| Rated Charging / Discharging Power | 4000 W | 5000 W | 6000 W |
| Battery Capacity | 100 ~ 800 Ah | | |
| Efficiency | | | |
| Max. PV Efficiency | 96.6 % | | |
| Euro. Efficiency | 94.5 % | | |
| Protection | | | |
| DC Switch | Integrated | | |
| Anti-Islanding-Protection | Integrated | | |
| Residual Current Monitoring | Integrated | | |
| PV Reverse Polarity Protection | Integrated | | |
| AC Short Circuit Protection | Integrated | | |
| AC Overvoltage Protection | Integrated | | |
| DC / AC Surge Protection | DC Type II; AC Type III | | |
| Remote Shutdown | Integrated | | |
| AFCI | Optional | | |
| General Specification | | | |
| Dimensions (W x H x D) | 725 × 490 × 245 mm | | |
| Weight | 40 kg | | |
| Operating Temperature Range | -25°C to + 60°C (> 40°C derating) | | |
| Cooling Type | Natural Convection | | |
| Max. Operation Altitude | ≤ 3000 m | | |
| Operation Humidity | 0 ~ 95% (no condensation) | | |
| IP Class | IP66 | | |
| Topology | High Frequency Isolation | | |
| Communication | RS485 / WIFI / (4G / Ethernet optional) | | |
| Display | LED+Bluetooth / APP / WEB | | |
| Certification & Standard | IEC/EN62109-1&2; IEC/EN 61000-6-1; IEC/EN 61000-6-2; EN 61000-6-3; IEC/EN 61000-6-4; IEC/EN 61000-3-11; EN 61000-3-12; IEC 60529; IEC 61727; IEC 62116; IEC 60068; IEC 61683; EN 50549-1; EN 50549-10; VDE-AR-N 4105; NC RfG:2018; C10/C11 | | |

1) Minimum voltage for inverter to start power output.

BlueSpark Series Residential ESS NEW

Three Phase / All-in-one Hybrid System / 8–12 kW

Save Your Energy Bill

- ▶ Powered by Tire 1 battery cell
- ▶ Human safe low-voltage solution
- ▶ Optional AFCI

Smart Home Energy

- ▶ Supports Self Consumption, Peak Shaving, Time-of-use, and Battery Priority operation modes
- ▶ SG Ready Heat Pump compatible

High Performance

- ▶ DC / AC ratio up to 2
- ▶ Long battery cycle life
- ▶ 100% three-phase unbalanced output

Easy Installation

- ▶ Stackable design, no wiring required
- ▶ Compact and space-saving
- ▶ IP66 rating for protection

Flexible Expansion

- ▶ Supports both on-grid and off-grid parallel configurations
- ▶ Max. 8 battery packs per system

Smart O&M

- ▶ 24 / 7 cloud monitoring
- ▶ Easy commissioning via Bluetooth
- ▶ Remote firmware upgrades



| Battery Model | | BP48100PF1A-G2 | |
|---------------------------|--|-------------------------------------|---|
| General Parameters | | | |
| Battery Type | LFP (LiFePO4) | Max. Continuous Charging Current | 80 A (single battery pack) |
| Cell Brand | EVE | Max. Continuous Charging Power | 4096 W |
| Energy Capacity | 5.12 kWh ¹⁾ | Max. Continuous Discharging Current | 80 A (single battery pack) |
| Usable Capacity | 4.6 kWh ²⁾ | Max. Continuous Discharging Power | 4096 W |
| Max. Depth of Discharge | 95% | Operating Temperature Range | -10 to 50°C (Charging); -10 to 50°C (Discharging) ³⁾ |
| Norminal Voltage | 51.2 V | Cooling Type | Natural Cooling |
| Operating Voltage Range | 44.8 ~ 57.6 V | Humidity | 0 ~ 95% (no condensation) |
| Battery Pack Round-Trip | > 94% | BMS | |
| Efficiency | 56 kg | Modules Connection | Max. 8 |
| Weight | 725 x 370 x 190mm | Capacity | 100 / 200 / 300 / 400 / 500 / 600 / 700 / 800 Ah |
| Dimensions (W x H x D) | IP65 | Communication | CAN |
| IP Protection | 5 Year Product Warranty, 10 Year Performance | Monitoring Parameters | System voltage, current, battery voltage, Battery temperature, PCBA temperature measurement |
| Warranty | | | |
| Certificate | Pack: IEC/EN 62619; UN38.3; Cell: IEC/EN 62619; UN38.3; UL1973 | | |
| Safety and Transportation | | | |

1) Total Energy Capacity is tested under the following conditions: @25°C, 0.5C charging / 0.5C discharging, at the beginning of life.

2) Usable Energy Capacity refers to the energy discharged from 100% to the minimum state of energy (SoE).

3) The operating temperature parameters only apply to battery pack models with heating function. For battery pack models without heating function, the operating temperature range will be: 0 to 50°C(Charging), -10 to 50°C(Discharging).

4) Minimum voltage for inverter to start power output.





5) According to the C10/11 of Synergrid, the maximum AC apparent output power is 10 kVA .The applicable hybrid inverter model is E10KTBE-D22.

| Hybrid Inverter Model | E8KT-D22 | E10KT-D22 | E12KT-D22 |
|-------------------------------------|--|---|-------------------|
| PV Input | | | |
| Recommended Max. PV Array | 16 kW | 20 kW | 22 kW |
| Input Power @STC | | | |
| Max PV Voltage | | 1000 V | |
| Nominal Voltage | | 720 V | |
| MPPT Voltage Range | | 140 ~ 950 V | |
| MPPT Voltage Range with Full Load | 290 ~ 800 V | 320 ~ 800 V | 350 ~ 800 V |
| Start Voltage ⁴⁾ | | 200 V | |
| Number of MPPT Tracker | | 2 | |
| String per MPPT Tracker | | 1 | |
| Max. Input Current per MPPT | | 20 A | |
| Max. Short-Circuit Current per MPPT | | 25 A | |
| AC Output & Input (Grid) | | | |
| Max. AC Continuous Output Power | 8000 W | 10000 W | 12000 W |
| Max. AC Apparent Output Power | 8800 VA | 11000 VA ⁵⁾ | 13200 VA |
| Max. Continuous Input Power | 16000 W | 20000 W | 22000 W |
| Nominal AC Voltage | | 400 Vac | |
| Normal Frequency | | 50 Hz / 60 Hz (±5 Hz) | |
| Normal Output Current | 11.6 A | 14.5 A | 17.4 A |
| Max. Output Current | 26.1 A | 26.1 A | 26.1 A |
| Max. Input Current | | 35 A | |
| Power Factor (cosΦ) | | -0.8 (Lagging) ~ 0.8 (Leading) | |
| THDi | | < 3% | |
| AC Output (Backup) | | | |
| Normal AC Output Power | 8000 W | 10000 W | 12000 W |
| Max. AC Output Power | 8000 VA | 10000 VA | 12000 VA |
| Normal Output Current | 11.6 A | 14.5 A | 17.4 A |
| Max. Output Current | 26.1 A | 26.1 A | 26.1 A |
| Normal Output Voltage | | 400 Vac | |
| Nominal Output Frequency | | 50 Hz / 60 Hz | |
| Output THDv (@Linear Load) | | 2% (Linear Load) | |
| Battery Input | | | |
| Battery Type | | LFP (LiFePO4) | |
| Nominal Battery Voltage | | 51.2 V | |
| Charging Voltage Range | | 44 ~ 58 V | |
| Max. Charging / Discharging Current | 160 A / 200 A | 200 A / 240 A | 200 A / 240 A |
| Rated Charging / Discharging Power | 8000 W | 10000 W | 10000 W / 12000 W |
| Battery Capacity | | 100 ~ 800 Ah | |
| Efficiency | | | |
| Max. PV Efficiency | | 97.2 % | |
| Euro. Efficiency | | 95.5 % | |
| Protection | | | |
| DC Switch | | Integrated | |
| Anti-Islanding-Protection | | Integrated | |
| Residual Current Monitoring | | Integrated | |
| PV Reverse Polarity Protection | | Integrated | |
| AC Short Circuit Protection | | Integrated | |
| AC Overvoltage Protection | | Integrated | |
| DC / AC Surge Protection | | DC Type II; AC Type III | |
| Remote Shutdown | | Integrated | |
| AFCI | | Optional | |
| General Specification | | | |
| Dimensions (W x H x D) | | 725 x 490 x 245 mm | |
| Weight | | 43 kg | |
| Operating Temperature Range | | -25°C to + 60°C (> 40°C derating) | |
| Cooling Type | | Intelligent Fan Cooling | |
| Max. Operation Altitude | | ≤ 3000 m | |
| Operation Humidity | | 0 ~ 95% (No Convection) | |
| IP Class | | IP66 | |
| Topology | | High Frequency Isolation | |
| Communication | | RS485 / WIFI / (4G / Ethernet optional) | |
| Display | | LED+Bluetooth / APP / WEB | |
| Certification & Standard | IEC/EN62109-1&2; IEC/EN 61000-6-1; IEC/EN 61000-6-2; EN 61000-6-3; IEC/EN 61000-6-4; IEC/EN 61000-3-11; EN 61000-3-12; IEC 60529; IEC 61727; IEC 62116; IEC 60068; IEC 61683; EN 50549-1; EN 50549-10; VDE-AR-N 4105; NC RFG:2018; C10/C11 | | |



BlueGlow Series NEW

Single Phase / On-grid / 3–6 kW

-  Max. PV Voltage up to 550 V
Support High-current Bifacial Modules
-  DC / AC Ratio up to 1.5
AFCI Optional
-  Reactive Power Control
WiFi Logger Standard / 4G Logger Optional
-  High Efficiency up to 98.1%
Smaller and Lighter



| MODEL | G3KS-D11 | G5KS-D11 | G5KS-B21 | G6KS-D11 | G6KS-B21 |
|-------------------------------------|--|-----------------|-----------------|-------------|---------------|
| Specifications | | | | | |
| Max. DC Power | 4.5 kWp | 7.5 kWp | 7.5 kWp | 9.0 kWp | 9.0 kWp |
| Max. DC Voltage | 550 V | | | | |
| Nominal Voltage | 360 V | | | | |
| Start Voltage | 80 V | | | | |
| MPPT Voltage Range | 60 ~ 550 V | | | | |
| MPPT Voltage Range at Full Load | 165 ~ 500 V | 265 ~ 500 V | 180 ~ 500 V | 330 ~ 500 V | 200 ~ 500 V |
| No. of MPPT | 1 | 1 | 2 | 1 | 2 |
| No. of Strings per MPPT | 1 | 1 | 1 | 1 | 1 |
| Number of Strings Input | 1 | 1 | 2 | 1 | 2 |
| Max. Input Current per MPPT | 20 A | 20 A | 16 A*2 | 20 A | 16 A*2 |
| Max. Short-circuit Current per MPPT | 30 A | 30 A | 25 A*2 | 30 A | 25 A*2 |
| Output (AC) | | | | | |
| Nominal AC Output Power | 3000 W | 5000 W | 5000 W | 6000 W | 6000 W |
| Max. AC Apparent Power | 3300 VA | 5500 VA | 5500 VA | 6000 VA | 6000 VA |
| Max. AC Output Power | 3300 W | 5500 W | 5500 W | 6000 W | 6000 W |
| Nominal AC Voltage | 220 V / 230 V | | | | |
| AC Grid Frequency Range | 50 Hz / 60 Hz (±5 Hz) | | | | |
| Rated Output Current | 13.7 A / 13.1 A | 22.7 A / 21.7 A | 22.7 A / 21.7 A | 27.3 / 26 A | 27.3 A / 26 A |
| Maximum Output Current | 15 A | 25 A | 25 A | 27.3 A | 27.3 A |
| Power Factor (Φ) | -0.8 (Lagging) ~ 0.8 (Leading) | | | | |
| THDi | < 3% (Nominal Power) | | | | |
| Efficiency | | | | | |
| Max. Efficiency | 97.5% | 98.1% | 98.1% | 98.1% | 98.1% |
| Euro Efficiency | 97.0% | 97.5% | 97.5% | 97.5% | 97.5% |
| Protection Devices | | | | | |
| DC Switch | Yes | | | | |
| Anti-islanding Protection | Yes | | | | |
| Output Over Current | Yes | | | | |
| DC Reverse Polarity Protection | Yes | | | | |
| String Fault Detection | Yes | | | | |
| Oversoltage Category | DC Type III / Type II Optional; AC Type III | | | | |
| Insulation Detection | Yes | | | | |
| AC Short Circuit Protection | Yes | | | | |
| AFCI Protection | Optional | | | | |
| General Specifications | | | | | |
| Dimensions (W x H x D) | 395 x 315 x 140 mm | | | | |
| Weight | 7.6 kg | 8.2 kg | 9.5 kg | 8.2 kg | 9.5 kg |
| Operating Temperature Range | -25°C ~ +60°C | | | | |
| Cooling Type | Natural | | | | |
| Max. Operating Altitude | ≤ 4000 m | | | | |
| Max. Operating Humidity | 0 ~ 100% | | | | |
| DC Input Terminal Type | Vaconn | | | | |
| AC Output Terminal Type | Quick connector | | | | |
| IP Class | IP66 | | | | |
| Topology | Transformerless | | | | |
| Communication | RS-485*2 / WIFI / GPRS / Bluetooth | | | | |
| Display | LCD / Bluetooth + App | | | | |
| Certificates | IEC 62109-1/2; IEC 61000; IEC 60068; IEC 61727; IEC 62116; IEC 61683 | | | | |

BlueGlow Series NEW

Single Phase / On-grid / 8-12 kW



Max. PV Voltage up to 600V
Type II DC / Type III AC SPD



Reactive Power Control
WiFi Logger Standard / 4G Logger Optional



DC / AC Ratio up to 1.5
AFCI Optional



High Efficiency up to 97.5%
Smaller and Lighter



| MODEL | G8K1 | G10K1 | G12K1 |
|-------------------------------------|--|--------------------|--------------------|
| Specifications | | | |
| Max. DC Power | 12 kWp | 15 kWp | 18 kWp |
| Max. DC Voltage | 600 V | | |
| Nominal Voltage | 360 V | | |
| Start Voltage | 80 V | | |
| MPPT Voltage Range | 60 ~ 550 V | | |
| MPPT Voltage Range at Full Load | 220 ~ 500 V | 270 ~ 500 V | 330 ~ 500 V |
| No. of MPPT | 2 | | |
| No. of Strings per MPPT | 1 | | |
| Number of Strings Input | 2 | | |
| Max. Input Current per MPPT | 20 A*2 | | |
| Max. Short-circuit Current per MPPT | 30 A*2 | | |
| Output (AC) | | | |
| Nominal AC Output Power | 8000 W | 10000 W | 12000 W |
| Max. AC Apparent Power | 8000 VA | 10000 VA | 12000 VA |
| Max. AC Output Power | 8000 W | 10000 W | 12000 W |
| Nominal AC Voltage | 220 V / 230 V | | |
| AC Grid Frequency Range | 50 Hz / 60 Hz (±5 Hz) | | |
| Rated Output Current | 36.4 A / 34.8 A | 45.5 A / 43.5 A | 54.5 A / 52.2 A |
| Maximum Output Current | 36.4 A | 45.5 A | 54.5 A |
| Power Factor (Φ) | -0.8 (Lagging) ~ 0.8 (Leading) | | |
| THDi | < 3% (Nominal Power) | | |
| Efficiency | | | |
| Max. Efficiency | 98.1% | | |
| Euro Efficiency | 97.5% | | |
| Protection Devices | | | |
| DC Switch | Yes | | |
| Anti-islanding Protection | Yes | | |
| Output Over Current | Yes | | |
| DC Reverse Polarity Protection | Yes | | |
| String Fault Detection | Yes | | |
| Overvoltage Category | DC Type III / Type II Optional; AC Type II | | |
| Insulation Detection | Yes | | |
| AC Short Circuit Protection | Yes | | |
| AFCI Protection | Optional | | |
| General Specifications | | | |
| Dimensions (W x H x D) | 380 x 483 x 161 mm | 380 x 483 x 161 mm | 380 x 483 x 193 mm |
| Weight | 14 kg | 14.5 kg | 17.5 kg |
| Operating Temperature Range | -25°C ~ +60°C | | |
| Cooling Type | Natural | | |
| Max. Operating Altitude | ≤ 4000 m | | |
| Max. Operating Humidity | 0 ~ 100% | | |
| DC Input Terminal Type | Vaconn | | |
| IP Class | IP66 | | |
| Topology | Transformerless | | |
| Communication | RS-485 / WIFI / GPRS / Bluetooth | | |
| Display | LCD / Bluetooth + App | | |
| Certificates | IEC 62109-1/2; IEC 61000; IEC 60068; IEC 61727; IEC 62116; IEC 61683 | | |

BluE-G Series

Single Phase / On-grid / 1–3 kW



Max. PV Voltage up to 600 V
DC / AC Ratio up to 1.5




Compatible for Big Capacity PV Panel
WiFi Logger Standard / 4G Logger Optional



Type III DC SPD / Type III AC SPD
IP66 Protection



High Efficiency up to 97.6%
Smaller and Lighter

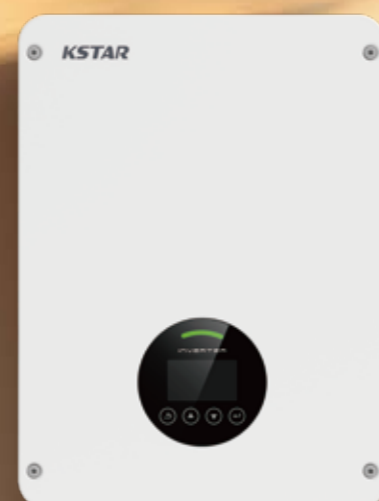





| MODEL | BluE-G 1000S-M1 | BluE-G 1500S-M1 | BluE-G 2000S-M1 | BluE-G 3000S-G2-M1 |
|-------------------------------------|--|-----------------|-----------------|--------------------|
| Input (DC) | | | | |
| Max. DC Voltage | 600 Vdc | | | |
| Nominal Voltage | 380 Vdc | | | |
| Start Voltage ¹⁾ | 60 V | 80 V | 80 V | 80 V |
| MPPT Voltage Range | 60 ~ 560 V | 80 ~ 560 V | 80 ~ 560 V | 80 ~ 560 V |
| Number of MPPT | 1 | | | |
| Strings per MPPT | 1 | | | |
| Max. input Current per MPPT | 13 A | | | |
| Max. Short-circuit Current per MPPT | 15.6 A | | | |
| Output (AC) | | | | |
| Nominal AC Output Power | 1000 W | 1500 W | 2000 W | 3000 W |
| Max. AC Apparent Power | 1100 VA | 1650 VA | 2200 VA | 3300 VA |
| Nominal AC Voltage | 230 V L-N | | | |
| AC Grid Frequency Range | 50 Hz / 60 Hz (±5 Hz) | | | |
| Max. Output Current (A) | 4.8 A | 7.2 A | 9.6 A | 14.4 A |
| Power Factor (cosΦ) | -0.8 (Lagging) ~ 0.8 (Leading) | | | |
| THDi | < 3% | | | |
| Efficiency | | | | |
| Max. Efficiency | 97.00% | 97.50% | 97.50% | 97.60% |
| Euro Efficiency | 96.50% | 97.00% | 97.00% | 97.00% |
| Protection devices | | | | |
| DC Switch | Yes | | | |
| Anti-islanding Protection | Yes | | | |
| Output Over Current Protection | Yes | | | |
| DC Reverse Polarity Protection | Yes | | | |
| DC / AC Surge Protection | DC Typ III; AC Typ III | | | |
| Insulation Detection | Yes | | | |
| AC Short Circuit Protection | Yes | | | |
| General Specifications | | | | |
| Dimensions (W x H x D) | 350 × 290 × 120 mm | | | |
| Weight | 7.3 kg | 8 kg | 8 kg | 8 kg |
| Environment | | | | |
| Operating Temperature Range | -25°C ~ +60°C | | | |
| Cooling Type | Natural convection | | | |
| Max. Operating Altitude | 4000 m | | | |
| Max. Operating Humidity | 0 ~ 100% | | | |
| AC Output Terminal Type | Quick Connector | | | |
| IP Class | IP66 | | | |
| Topology | Transformerless | | | |
| Communication Interface | RS-485 / WIFI / 4G | | | |
| Display | LCD / Bluetooth + App | | | |
| Certification & Standard | EN/IEC 62109-1/2; IEC/EN 61000-6-2; IEC/EN 61000-6-4; IEC 62116; IEC 61727; EN 50549-1 | | | |

1) Minimum voltage for inverter to start power output.



BluE-G Series

Single Phase / On-grid / 3–8 kW

-  Max. PV Voltage up to 600 V
DC / AC Ratio up to 1.5
-  Type III DC SPD / Type III AC SPD
IP65 Protection
-  Compatible for Big Capacity PV Panel
WiFi Logger Standard / 4G Logger Optional
-  High Efficiency up to 98.1%
Smaller and Lighter



| MODEL | BluE-G 4000D-M1 | BluE-G 5000D-M1 | BluE-G 6000D-M1 | BluE-G 8000D |
|-------------------------------------|--|-----------------------|--------------------|---------------------------|
| Input (DC) | | | | |
| Max. DC Voltage | 600 V | | | |
| Nominal Voltage | 380 V | | | |
| Start Voltage ⁵⁾ | 120 V | 120 V | 120 V | 100 V |
| MPPT Voltage Range | 80 ~ 560 V | 80 ~ 560 V | 80 ~ 560 V | 80 ~ 540 V |
| Number of MPPT | 2 | | | |
| Strings per MPPT | 1 | | | |
| Max. Input Current per MPPT | 15 A | 15 A | 15 A | 26 A / 16 A ¹⁾ |
| Max. Short-circuit Current per MPPT | 18 A | 18 A | 18 A | 31 A / 19 A |
| Output (AC) | | | | |
| Nominal AC Output Power | 4000 W | 5000 W ²⁾ | 6000 W | 8000 W |
| Max. AC Apparent Power | 4400 VA | 5500 VA ³⁾ | 6000 VA | 8000 VA |
| Nominal AC Voltage | 230 V L-N | | | |
| AC Grid Frequency Range | 50 Hz / 60 Hz (±5 Hz) | | | |
| Max. Output Current | 19 A | 24 A ⁴⁾ | 26 A | 35 A |
| THDi | -0.8 (Lagging) ~ 0.8 (Leading) | | | |
| Power Factor (cosΦ) | < 3% | | | |
| Efficiency | | | | |
| Max. Efficiency | 98.1% | | | |
| Euro Efficiency | 97.5% | | | |
| Protection devices | | | | |
| DC Switch | Yes | | | |
| Anti-islanding Protection | Yes | | | |
| Output Over Current Protection | Yes | | | |
| DC Reverse Polarity Protection | Yes | | | |
| DC / AC Surge Protection | DC Typ III; AC Typ III | | | |
| Insulation Detection | Yes | | | |
| AC Short Circuit Protection | Yes | | | |
| General Specifications | | | | |
| Dimensions (W x H x D) | 380 x 380 x 150 mm | | | |
| Weight | 11 kg | 11 kg | 11 kg | 13 kg |
| Operating Temperature Range | -25°C ~ +60°C | | | |
| Cooling Type | Natural convection | Natural convection | Natural convection | Fan cooling |
| Max. Operating Altitude | ≤ 4000 m | | | |
| Max. Operating Humidity | 0 ~ 100% | | | |
| AC Output Terminal Type | Quick Connector | | | |
| IP Class | IP65 | | | |
| Topology | Transformerless | | | |
| Communication | RS-485 / WIFI / 4G | | | |
| Display | LCD / Bluetooth + App | | | |
| Certification & Standard | EN/IEC 62109-1/2 ; IEC/EN 61000-6-2; IEC/EN 61000-6-4; IEC 61683; IEC 60068; IEC 60529; IEC 62116; IEC 61727; EN 50549-1; AS 4777.2; NRS 097; VDE-AR-N-4105; VDE 0126-1-1; CEI 0-21; G98/G99; C10/11; UNE 217001; UNE 217002; NB/T 32004-2018 ; GB/T 19964-2012; | | | |

1) The maximum current of PV1 is 26 A , So PV1 can be expanded into two Strings by using Y-connectors.

2) Nominal AC output power is 4999 W for Australia and 4600 W for Germany and South Africa.


3) Max. AC apparent power is 3680 VA for the UK; Max. AC apparent power is 4999 VA for Australia, 5000 VA for Belgium and 4600 VA for Germany and South Africa.


4) Maximum output current is 16 A for England; Maximum output current is 21.7 A for Australia and 20 A for Germany and South Africa.

5) Minimum voltage for inverter to start power output.


BlueGlow Series NEW

Three Phase / On-grid / 10–25 kW

 Max. PV Voltage up to 1100 V
Type II DC / AC SPD

 Compatible for Big Capacity PV Panel
WiFi Logger Standard / 4G Logger Optional

 DC / AC Ratio up to 1.3
IP66 Protection

 High Efficiency up to 98.6%
Smaller and Lighter








| MODEL | BluE-10KT-M6 | BluE-12KT-M6 | BluE-15KT-M6 | BluE-20KT-M6 | BluE-25KT-M6 |
|--|--|--------------------|--------------------|--------------------|--------------------|
| Input (DC) | | | | | |
| Recommended Max. PV Array Input Power @STC | 13 kW | 15.6 kW | 19.5 kW | 26 kW | 32.5 kW |
| Max. DC Voltage | 1100 V | | | | |
| Nominal Voltage | 650 V | | | | |
| Start Voltage | 250 V | | | | |
| MPPT Voltage Range | 140 ~ 1000 V | 140 ~ 1000 V | 140 ~ 1000 V | 140 ~ 1000 V | 200 ~ 1000 V |
| MPPT Voltage Range (Full load) | 420 ~ 850 V | 420 ~ 850 V | 420 ~ 850 V | 480 ~ 850 V | 480 ~ 850 V |
| Number of MPPT | 2 | | | | |
| Max. Number of String per MPPT | 1 | 1 | 1 | 2 | 2 |
| Max. Input Current per MPPT | 20 A | 20 A | 20 A | 32 A | 40 A / 32 A |
| Max. Short-circuit Current per MPPT | 30 A | 30 A | 30 A | 50 A | 60 A / 50 A |
| Output (AC) | | | | | |
| Nominal AC Output Power | 10000 W | 12000 W | 15000 W | 20000 W | 25000 W |
| Max. AC Output apparent Power | 11000 VA | 13200 VA | 16500 VA | 22000 VA | 27500 VA |
| Max. AC Output active Power | 11000 W | 13200 W | 16500 W | 22000 W | 27500 W |
| Nominal Voltage | 400 V / 230 V, 3P+N+PE | | | | |
| AC Grid Frequency Range | 50 Hz / 60 Hz | | | | |
| Max. Output Current | 16 A | 19.2 A | 23.9 A | 31.9 A | 39.9 A |
| Power Factor (Φ) | -0.8 (Lagging) ~ 0.8 (Leading) | | | | |
| THDi | < 3% (Nominal Power) | | | | |
| Efficiency | | | | | |
| Max. Efficiency | 98.3% | 98.3% | 98.3% | 98.6% | 98.6% |
| Euro Efficiency | 98.0% | 98.0% | 98.0% | 98.3% | 98.3% |
| Protection devices | | | | | |
| DC Switch | Yes | | | | |
| Output Over Current Protection | Yes | | | | |
| Anti-islanding Protection | Yes | | | | |
| DC Reverse Polarity Protection | Yes | | | | |
| Insulation Detection | Yes | | | | |
| DC / AC Surge Protection | DC Type II; AC Type III; Type II Optional | | | | |
| Residual Current Monitoring | Yes | | | | |
| AFCI | Optional | | | | |
| General Specifications | | | | | |
| Dimensions (W x H x D) | 380 x 483 x 161 mm | 380 x 483 x 161 mm | 380 x 483 x 193 mm | 380 x 483 x 193 mm | 380 x 483 x 223 mm |
| Weight | 16 kg | 16 kg | 18.8 kg | 18.8 kg | 19.6 kg |
| Operating Temperature Range | -25°C ~ +60°C | | | | |
| Cooling Type | Natural cooling | Natural cooling | Natural cooling | Fan cooling | Fan cooling |
| Max. Operating Altitude | 4000 m (> 3000 m derating) | | | | |
| Max. Operating Humidity | 0 ~ 100% | | | | |
| AC Output Terminal Type | OT | | | | |
| IP Class | IP66 | | | | |
| Topology | Transformerless | | | | |
| PV Input Terminal Type | MC4 | | | | |
| Display | LCD | | | | |
| Certification & Standard | EN/IEC 62109~1; EN/IEC 62109~2; IEC/EN 61000~6~1; IEC/EN 61000~6~3; IEC/EN 61000~6~2; IEC/EN 61000~6 4; IEC 61683; IEC 60068; IEC 62116; IEC61727; | | | | |



BluE Series

Three Phase / On-grid / 5–12 kW

-  Max. PV Voltage up to 1100 V
Type II DC / AC SPD
-  DC / AC Ratio up to 1.3
IP66 Protection
-  Compatible for Big Capacity PV Panel
WiFi Logger Standard / 4G Logger Optional
-  High Efficiency up to 98.6%
Smaller and Lighter

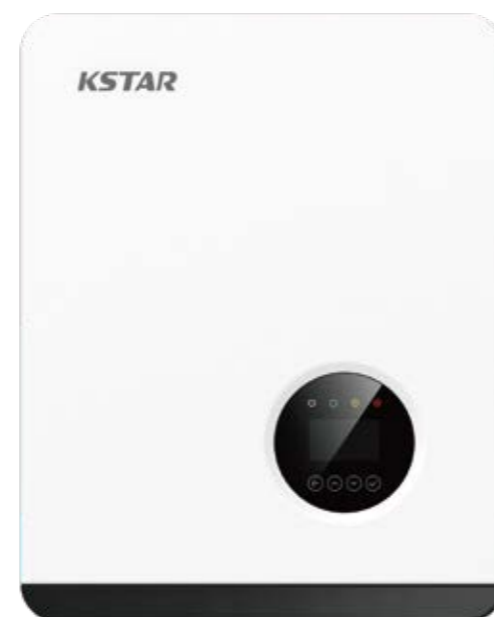

| MODEL | BluE-5KT-M1 | BluE-6KT-M1 | BluE-8KT-M1 | BluE-10KT-M1 | BluE-12KT-M1 |
|-------------------------------------|--|-------------|-------------|------------------------|--------------|
| Input (DC) | | | | | |
| Max. DC Voltage | 1100 V | | | | |
| Nominal Voltage | 650 V | | | | |
| Start Voltage ¹⁾ | 250 V | | | | |
| Number of MPPT | 140 ~ 1000 V | | | | |
| Strings per MPPT | 2 | | | | |
| MPPT Voltage Range | 1 | | | | |
| Max. Input Current per MPPT | 15 A | | | | |
| Max. Short-circuit Current per MPPT | 20 A | | | | |
| Output (AC) | | | | | |
| Nominal AC Output Power | 5000 W | 6000 W | 8000 W | 10000 W | 12000 W |
| Maximum AC Output Power | 5500 VA | 6600 VA | 8800 VA | 11000 VA ²⁾ | 13200 VA |
| Nominal AC Voltage | 400 V / 230 V, 3P+N+PE | | | | |
| AC Grid Frequency Range | 50 Hz / 60 Hz (±5 Hz) | | | | |
| Maximum Output Current | 8.0 A | 9.6 A | 12.8 A | 16.0 A ²⁾ | 19.2 A |
| Power Factor (Φ) | -0.8 (Lagging) ~ 0.8 (Leading) | | | | |
| THDi | < 3% (Nominal Power) | | | | |
| Efficiency | | | | | |
| Max. Efficiency | 98.4% | 98.4% | 98.6% | 98.6% | 98.6% |
| Euro Efficiency | 97.5% | 97.5% | 98.0% | 98.1% | 98.1% |
| Protection devices | | | | | |
| DC Switch | Yes | | | | |
| Output Over Current Protection | Yes | | | | |
| Anti-islanding Protection | Yes | | | | |
| DC Reverse Polarity Protection | Yes | | | | |
| String Fault Detection | Yes | | | | |
| DC / AC Surge Protection | DC Type II; AC Type III; Type II Optional | | | | |
| Insulation Detection | Yes | | | | |
| AC Short Circuit Protection | Yes | | | | |
| General Specifications | | | | | |
| Dimensions (W x H x D) | 380 x 483 x 161 mm | | | | |
| Weight | < 17 kg | | | | |
| Operating Temperature Range | -25°C ~ +60°C | | | | |
| Cooling Type | Natural cooling | | | | |
| Max. Operating Altitude | 4000 m | | | | |
| Max. Operating Humidity | 0 ~ 100% (No condensation) | | | | |
| AC Output Terminal Type | Connector | | | | |
| IP Class | IP66 | | | | |
| Topology | Transformerless | | | | |
| Communication | RS-485 / WIFI / 4G | | | | |
| Display | LCD | | | | |
| Certification & Standard | EN/IEC 62109-1/2; IEC/EN 61000-6-2; IEC/EN 61000-6-4; IEC 61683; IEC 60068; IEC 60529; IEC 62116; IEC 61727; EN 50549-1; VDE-AR-N-4105; VDE 0126-1-1; CEI 0-21; G98/G99; C10/11; NB/T 32004-2018; GB/T 19964-2012; | | | | |

1) Minimum voltage for inverter to start power output.

2) According to the C10/11 of Synergrid, the maximum AC output power is 10 kVA and therefore the maximum AC output current is 14.5A.

BluE Series

Three Phase / On-grid / 15–25 kW



Max. PV Voltage up to 1100 V
Type II DC / AC SPD




Compatible for Big Capacity PV Panel
WiFi Logger Standard / 4G Logger Optional



DC / AC Ratio up to 1.3
IP66 Protection



High Efficiency up to 98.6%
Smaller and Lighter

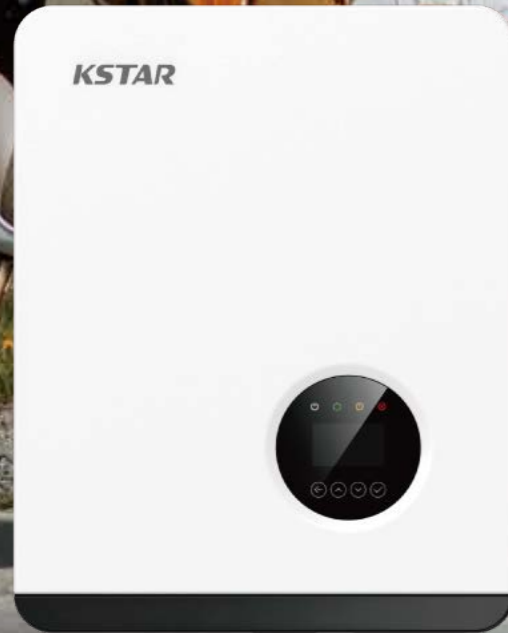





| MODEL | BluE-15KT-M1 | BluE-20KT-M1 | BluE-25KT-M1 |
|-------------------------------------|---|--------------|--------------|
| Input (DC) | | | |
| Max. DC Voltage | 1100 V | | |
| Nominal Voltage | 650 V | | |
| Start Voltage | 250 V | | |
| MPPT Voltage Range | 140 ~ 1000 V | | |
| Number of MPPT Tracker | 2 | | |
| Strings per MPPT Tracker | 2 / 1 | 2 | 2 |
| Max. input Current per MPPT | 30 A / 15 A | 30 A | 30 A |
| Max. Short-circuit Current per MPPT | 40 A / 20 A | 40 A | 40 A |
| Output (AC) | | | |
| Nominal AC Output Power | 15000 W | 20000 W | 25000 W |
| Max. AC Output Power | 16500 VA | 22000 VA | 27500 VA |
| Nominal AC Voltage | 400 V / 230 V, 3P+N+PE | | |
| AC Grid Frequency Range | 50 Hz / 60 Hz (±5 Hz) | | |
| Max. Output Current | 23.9 A | 31.9 A | 39.9 A |
| Power Factor (cosΦ) | -0.8 (Lagging) ~ 0.8 (Leading) | | |
| THDi | 3% | | |
| Efficiency | | | |
| Max. Efficiency | 98.6% | | |
| Euro Efficiency | 98.2% | 98.3% | 98.3% |
| Protection Devices | | | |
| DC Switch | Yes | | |
| Anti-islanding Protection | Yes | | |
| Output Over Current Protection | Yes | | |
| DC Reverse Polarity Protection | Yes | | |
| String Fault Detection | Yes | | |
| AC / DC Surge Protection | DC Type II; AC Type III; Type II Optional | | |
| Insulation Detection | Yes | | |
| AC Short Circuit Protection | Yes | | |
| General Specifications | | | |
| Dimensions (W x H x D) | 380 x 483 x 193 mm | | |
| Weight | 20.7 kg | | |
| Operating Temperature Range | -25°C ~ +60°C | | |
| Cooling Type | Natural cooling | Fan Cooling | Fan Cooling |
| Max. Operating Altitude | 4000 m | | |
| Max. Operating Humidity | 0 ~ 100% (No condensation) | | |
| AC Output Terminal Type | Connector | | |
| IP Class | IP66 | | |
| Topology | Transformerless | | |
| Communication Interface | RS-485 / WIFI / 4G | | |
| Display | LCD | | |
| Certification & Standard | EN/IEC 62109-1/2; IEC/EN 61000-6-2; IEC/EN 61000-6-4; IEC 61683; IEC 60068; IEC 60529; IEC 62116; IEC 61727; EN 50549-1; VDE-AR-N-4105; VDE 0126-1-1; CEI 0-21; G99; C10/11; NB/T 32004-2018; GB/T 19964-2012 | | |



BluE Series (LV)

Three Phase / On-grid / 12–20 kW

-  Max. PV voltage up to 800 V
Type II DC / AC SPD
-  DC / AC ratio up to 2
IP66 protection
-  Reactive power control
WiFi Logger Standard / 4G Logger Optional
-  High efficiency up to 98.6%
Smaller and lighter



| MODEL | BluE-12KTL-M1 | BluE-15KTL-M1 | BluE-20KTL-M2 |
|-------------------------------------|--|--------------------|--------------------|
| Input (DC) | | | |
| Max. DC Voltage | | 800 V | |
| Nominal Voltage | | 370 V | |
| Start Voltage | | 250 V | |
| MPPT Voltage Range | | 200 ~ 750 V | |
| Number of MPPT Tracker | | 2 | |
| Strings per MPPT Tracker | | 2 | |
| Max. input Current per MPPT | | 30 A | |
| Max. Short-circuit Current per MPPT | | 40 A | |
| Output (AC) | | | |
| Nominal AC Output Power | 12000 W | 15000 W | 20000 W |
| Max. AC Output Power | 13200 VA | 16500 VA | 22000 VA |
| Nominal AC Voltage | 220 V 3L+N | | |
| AC Grid Frequency Range | 50 Hz / 60 Hz (±5 Hz) | | |
| Max. Output Current | 34.6 A | 43.3 A | 57.7 A |
| Power Factor (cosΦ) | -0.8 (Lagging) ~ 0.8 (Leading) | | |
| THDi | 3% | | |
| Efficiency | | | |
| Max. Efficiency | 98.6% | | |
| Euro Efficiency | 98.3% | | |
| Protection Devices | | | |
| DC Switch | Yes | | |
| Anti-islanding Protection | Yes | | |
| Output Over Current Protection | Yes | | |
| DC Reverse Polarity Protection | Yes | | |
| String Fault Detection | Yes | | |
| AC / DC Surge Protection | DC: Type II / AC: Type III / Type II Optional | | |
| Insulation Detection | Yes | | |
| AC Short Circuit Protection | Yes | | |
| General Specifications | | | |
| Dimensions (W x H x D) | 380 x 483 x 193 mm | 380 x 483 x 223 mm | 380 x 483 x 227 mm |
| Weight | 20.7 kg | 25.5 kg | 32.5 kg |
| Operating Temperature Range | -25°C ~ +60°C | | |
| Cooling Type | Fan Cooling | | |
| Max. Operating Altitude | 4000 m | | |
| Max. Operating Humidity | 0 ~ 100% (No Condensation) | | |
| AC Output Terminal Type | Connector | | |
| IP Class | IP66 | | |
| Topology | Transformerless | | |
| Communication Interface | RS-485 / WIFI / 4G | | |
| Display | LCD | | |
| Certification & Standard | EN/IEC62109-1/2; IEC/EN61000-6-2; IEC/EN61000-6-4; IEC61683; IEC60068; IEC60529; IEC62116; IEC61727; | | |

GreenFlow AC Charger

Single Phase / Wall-mounted / 7 kW

User-friendly Experience

- ▶ Start / end Charging via an RFID Card or Smart Mobile App
- ▶ OTA Updates

Secure and Robust

- ▶ Suitable for Outdoor Environment
- ▶ Embedded RCD

Smart Charging

- ▶ Scheduled Pre-set Charging
- ▶ Compatible with Most EVs



| MODEL | CAS7 |
|--------------------------------|--|
| Product Information | |
| Input Wiring | 1P+N+PE |
| Rated Power | 7 kW |
| Rated Input Voltage | 230 V AC ±15% |
| Rated Current | 32 A |
| Charging Mode | Mode 3 |
| Network Type | TT, TN |
| Connector Type | IEC 62196 Type 2 Plug, 5 m |
| Protection | Over-voltage protection, under-voltage protection, short circuit protection, grounding protection, over temperature protection, lightning protection |
| Dimensions (W x H x D) | 216 x 268 x 105 mm |
| Frequency | 50 ~ 60 Hz |
| RCD | 6 mA DC + 30 mA Type A |
| Metering | On-Board Measurement |
| Card Reader | Mifare ISO / IEC14443 Type A |
| General Characteristics | |
| Activation Method | Plug n' Charge & RFID Card & App |
| App Function | Remote start & stop, Scheduled Charging, Real-time Monitoring, Data Display, Power Adjusting |
| Operating Altitude | < 2000 m |
| Operating Temperature | -30°C ~ +50°C |
| Storage Temperature | -40°C ~ +50°C |
| Operating Humidity | 5% ~ 95% |
| Communication | WIFI + Bluetooth |
| LED | RGB LED |
| IP Rating | IP65 |
| IK Rating | IK10 |
| Certification | CE |
| EMC | Class B |
| IEC Standard | EN IEC 61851-1:2019 IEC61851-1:2017 IEC61851-21-2:2021 |
| Warranty | 2 Years |



Stick Logger

LSW-5 / LSE-4W / LS4G-4



-  Remote Control
-  Remote Upgrade
-  Plug and Play
-  7/24 Monitoring

The stick logger enables long-term, effective monitoring of the solar and energy system by collecting the inverter's operating and power generation data. The cloud platform offers strong data support, while the collected data is sent to the monitoring platform via different interfaces, such as WiFi, Ethernet, 4G and more. Real-time and historical system data is displayed in clear, intuitive charts, allowing users to monitor the system anytime, anywhere.

| MODEL | LSW-5 | LSE-4W | LS4G-4 |
|---|---|------------------------|------------------------|
| Wireless Parameters | | | |
| Remote Way | WiFi | Ethernet / WIFI | 4G |
| Number of connect inverters | 1 | | |
| Data Transmission Interval | Default: 5 mins (1 ~ 15 mins Optional) | | |
| External Interface | N / A | RJ45 | Micro SIM card slot |
| Hardware Parameters | | | |
| Working Voltage | DC 5 V ~ DC 12 V | | |
| Working Power | 1.5 W | 1.5 W | 3.5 W |
| Indicator Light | One connected to inverter One connected to router One heartbeat indicator light | | |
| Data Storage | Default: 8M Byte Flash | Default: 4M Byte Flash | Default: 8M Byte Flash |
| Working Temperature | -30°C ~ +70°C | | |
| Working Humidity | Relative humidity: 10% ~ 90%, No Condensation | | |
| Storage Temperature | -45°C ~ +90°C | | |
| Storage Humidity | < 40% | | |
| IP Grade | IP65 | | |
| Software AT+Instruction set Parameters | | | |
| Serial Communication Rate | Default: 9600 bps (1200 ~ 115200 bps Optional) | | |
| Configuration | AT+Instruction Set Localweb Configuration Remote Server Bluetooth | | |
| Firmware Upgrade | Local Web Upgrade; Remote Update | | |
| Working Mode | AP+STA | | |
| Others | Real-time Control, Data Resuming | | |

* It is recommended to use Stick logger (WiFi) for residential systems. And Stick Logger (Ethernet / 4G) is optional.
* The 4G datalogger just can be used in Europe. Please contact KSTAR team for specific available countries.

SDM630MCT40mA Smart Meter


DIN Rail Energy Meter for Single and Three Phase Electrical Systems

- ▶ Measures kWh kVArh, kW, kVAr, kVA, P, F, PF, Hz, dmd, V, A, THD, etc.
- ▶ Bi-directional measurement IMP & EXP
- ▶ Two pulse outputs
- ▶ RS-485 Modbus
- ▶ Din rail mounting 35mm
- ▶ 40 mA CT connection
- ▶ Better than Class 1 / B accuracy



| MODEL | SDM630MCT40mA |
|-----------------------------|--|
| Measurement Accuracy | |
| Type of Measurement | RMS including harmonics on three phase AC system (3P,3P+N) |
| Power | 0.5% of range maximum |
| Active Energy | IEC 62053 - 22 Class 0.5S, IEC 62053 - 21 Class 1.0 |
| Reactive Energy | IEC 62053-23 Class 2 |
| Frequency | 0.2% of mid-frequency |
| Current | 0.5% of range maximum |
| Voltage | 0.5% of range maximum |
| Power Factor | 1% of unity (0.01) |
| Input | |
| CT Secondary / Primary | 40 mA / 120 A |
| Rated Voltage (Un) | 380 / 400 V a.c. |
| Operating Voltage Range | 173 to 480 V a.c. (L-L) |
| Communications | |
| Communication Protocol | Modbus RTU |
| Communication Address | 1 ~ 247 |
| Transmission Distance | 1000 m Maximum |
| Transmission Speed | 1200 bps ~ 38400 bps |
| Parity | None (default), Odd, Even |
| Stop Bits | 1 |
| Response Time | < 100 ms |

* SDM630MCT40mA smart meter is recommended to be used along with residential string inverters and ESS hybrid inverters.
 ** It has included three 120A/40mA Current Transformers. For system larger than 80 kW, users need to purchase larger capacity CT that meets the following requirements:
 1. The selected CT's primary rating should be larger than the maximum current passing through the system's AC busbar.
 2. Maximum Current = system capacity / 230 / 3
 *** Please consult KSTAR for more details.

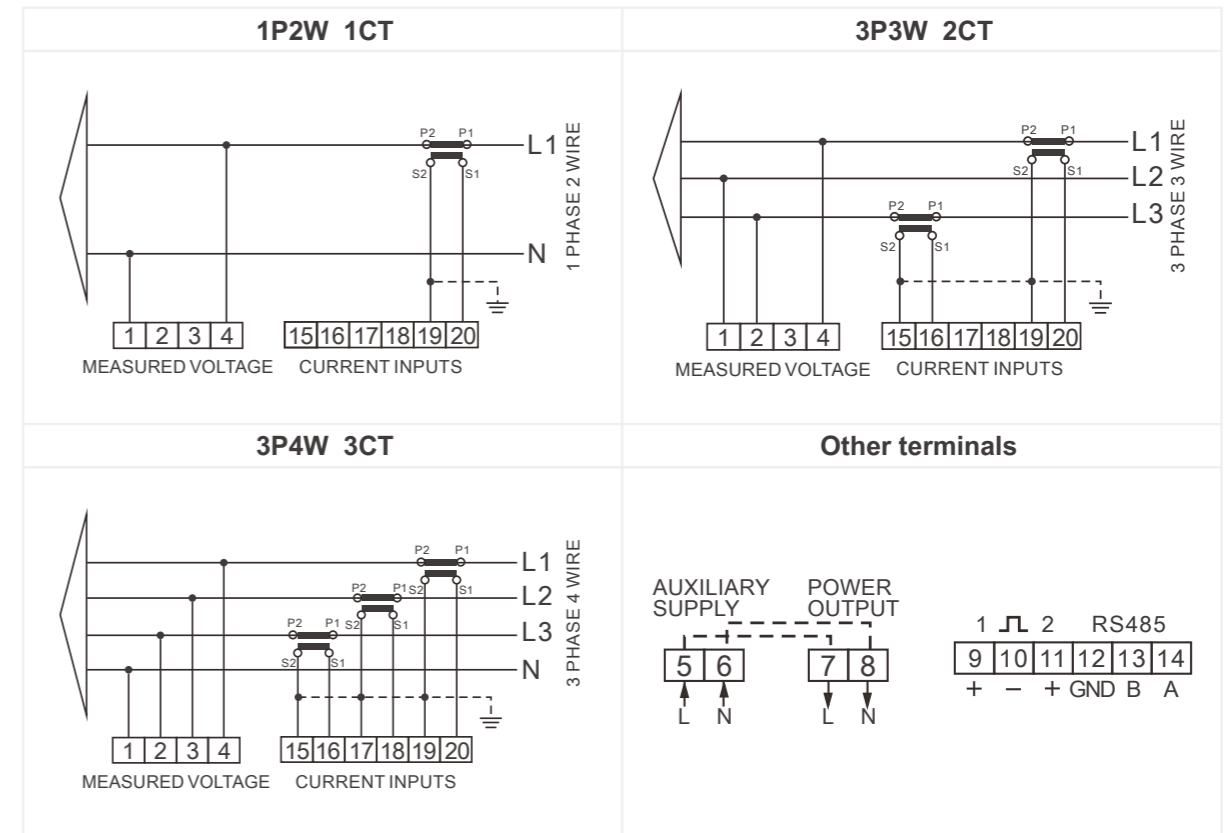

One click away from 24/7 technical support

- Remote Energy Monitoring and Analytics
- Integration with Smart Home Systems
- Fault Detection and Maintenance
- Comprehensive Data Visualization
- Grid Interaction and Net Metering
- Detailed Configuration Settings
- Enhanced System Lifespan
- Collaborative Monitoring
- Extended Historical Data Analysis

KSTAR SPIRIT

At KSTAR, we understand that technical service is the cornerstone of a reliable and efficient solar solution. Our commitment to unparalleled technical support ensures that your solar investment operates at peak performance throughout its lifecycle.

Illuminate Tomorrow: Technical Support Today, Tomorrow, Always.



01 Residential ESS Project in Lithuania



02 Residential ESS Project in the Netherlands



03 Residential ESS Project in the Netherlands



04 Residential ESS Project in the Netherlands



05 Residential ESS Project in Ukraine



06 Residential ESS Project in Ukraine



07 Residential ESS Project in Bulgaria



08 Residential Solar Project in Brazil



09 Residential ESS Project in Italy



10 Residential ESS Project in the Netherlands



11 Residential Solar Project in Brazil



12 Residential ESS Project
in Europe



13 Residential ESS Project
in Europe



14 Residential Solar Project
in Brazil



15 Residential ESS Project
in Belgium