

BlueWave **NEW**

Three Phase / 1500 Vdc / 350 kW

Lower CapEx and OpEx


- ▶ Power line communication (PLC)
- ▶ Night SVG function
- ▶ Supports both Al and Cu cable

Maximize Solar Yield

- ▶ 12 independent MPPT
- ▶ Max. efficiency up to 99%
- ▶ Smart I-V curve scan

Improved Safety

- ▶ Type II DC & AC SPD
- ▶ PID Recovery optional
- ▶ AFCI optional

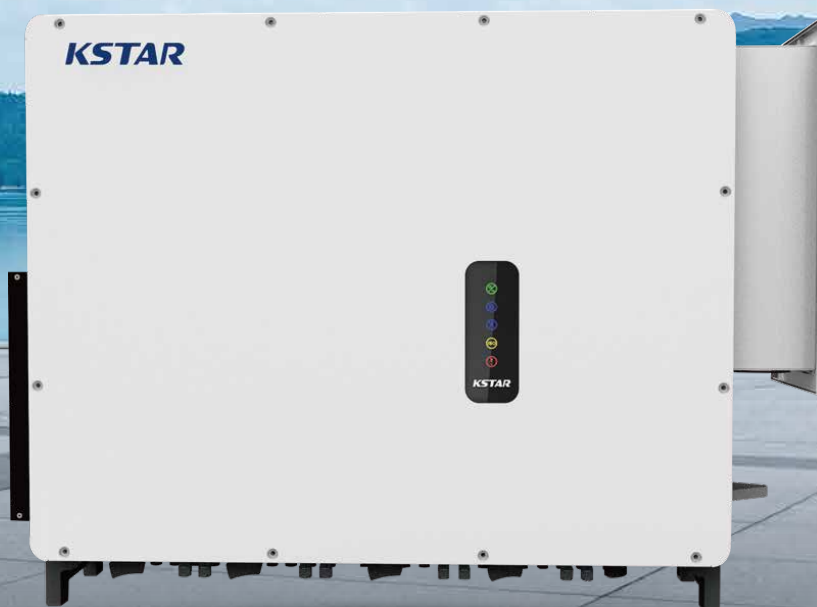

MODEL	G350KTHC	G350KTH
Input(DC)		
Max. DC Voltage	1500 V	
Max. Input Current Per MPPT	30 A	40 A
Max. Short-circuit Current Per MPPT	45 A	60 A
Start Voltage	650 V	
MPPT Voltage Range	500 ~ 1500 V	
Number of Strings	32	24
Number of MPPT	16	12
Strings Per MPPT	2	
Output(AC)		
Nominal AC Output Power	350 kW	
Max. AC Apparent Power	352 kVA	
Nominal AC Voltage	800 V, 3W+PE	
Nominal Frequency	50 Hz / 60 Hz (± 5 Hz)	
Frequency Range	45 ~ 55 Hz / 55 ~ 65 Hz	
Max. Output Current	254 A	
Power Factor (cos Φ)	0.8 (Leading) ~ 0.8 (Lagging)	
THDi	< 3% (Nominal Power)	
Efficiency		
Max. Efficiency	99%	
Protection Devices		
DC Switch	Yes	
Anti-islanding Protection	Yes	
Over Current Protection	Yes	
DC Reverse Polarity Protection	Yes	
String Fault Detection	Yes	
DC / AC Surge Protection	Type II	
AC Short Circuit Protection	Yes	
Residual Current Detection	Yes	
AFCI Function	Optional	
PID Recovery	Optional	
Night SVG Function	Optional	
General Specifications		
Dimensions (W x H x D)	1180 x 860 x 362 mm	
Weight	125 kg	
Operating Temperature Range	-30 ~ 60°C	
Cooling Type	Fan Cooling	
Max. Operation Altitude	5000 m (> 4000 m Derating)	
Max. Operating Humidity	0 ~ 100%	
AC Output Terminal Type	OT terminal	
IP Class	IP66	
Noise (dB)	≤ 75 dB	
Topology	Transformerless	
Communication	RS-485 / PLC	
Display	LED , Buletooth+APP	